



Maximum Gain

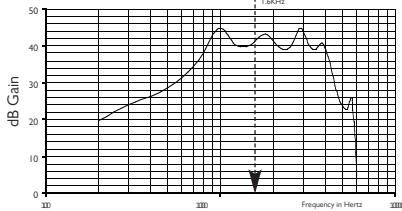


Input: 60dB SPL - Volume Control in Full-on Gain Position

Maximum Output

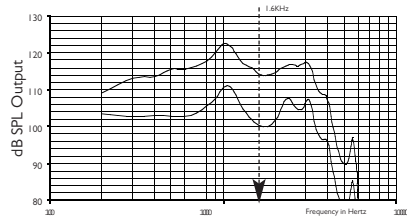


Input: 90dB SPL - Volume Control in Full-on Gain Position

Basic Frequency Response

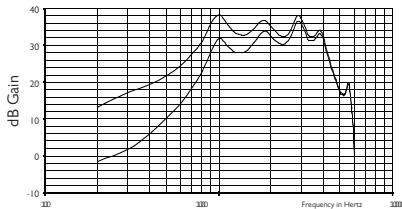


Input: 60dB SPL - Volume Control in RTG Position

Response of Telecoil

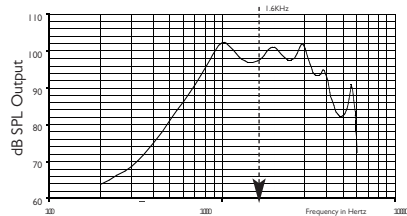

Input: 10mA/m Magnetic Field - Volume Control in Full-on Gain Position

Tone Control 'H' - Pre-set low frequency cut control. Rotation of the 'H' control in the direction of the widening 'eyebrow' (clockwise) introduces progressive low frequency cut of a nominal 15dB at 300Hz.



Peak Clip Control 'P' - Pre-set output limiting control. This control provides peak clipping of a nominal 14 dB SPL. Rotation of the 'P' control in the direction of the widening 'eyebrow' (clockwise) increases the maximum output.